

10/20/98
jc525 U.S. PTO

PATENT
Attorney Docket No. L0012/7001

Box Patent Application
Assistant Commissioner for Patents
Washington, DC 20231

A
jc540 U.S. PTO
09/175522
10/20/98

NEW APPLICATION TRANSMITTAL LETTER

Sir:

Transmitted herewith for filing is the Patent Application of

Inventor(s): Paul Stephan Bedrosian

For: OPTICAL SYNCHRONIZATION SYSTEM

Enclosed are the following papers required to obtain a filing date under 37
C.F.R. §1.53(b):

<u>20</u>	Pages of Specification	<input checked="" type="checkbox"/> Assignment
<u>4</u>	Pages of Claims	<input checked="" type="checkbox"/> Declaration and Power of Attorney
<u>1</u>	Page of Abstract	
<u>4</u>	Sheets of Drawings	<input checked="" type="checkbox"/> Certificate of Express Mailing
	<input type="checkbox"/> Formal	Express Mail Label No. <u>EL210104252US</u>
	<input checked="" type="checkbox"/> Informal	

FEE CALCULATION:

	NUMBER FILED		BASIC FEE ALLOWANCE		NUMBER EXTRA		RATE	
Total Claims:	21	-	20	=	<u>1</u>	X	\$22.00	= \$ 22.00
Independent Claims:	2	-	3	=	<u>0</u>	X	\$82.00	= \$ 0.00
Basic Fee:								\$790.00
TOTAL:								\$ 812.00

_____ A check in the amount of \$**** is enclosed to cover the Filing Fee.

_____ A check in the amount of \$40.00 is enclosed to cover the Recording Fee for the Assignment. A duplicate copy of this transmittal letter is enclosed.

The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§1.16 and 1.17 that may be required by this paper or any paper filed in connection with this Patent Application, or credit any overpayment, to Deposit Account No. 12-2325.

Please address all communications and telephone calls to the undersigned.

Respectfully submitted,




James W. Wiegand
39,423
KUDIRKA & JOBSE, LLP
Two Center Plaza
Boston, MA 02108
(617) 367-4600

09411161-0303
SECRET

I hereby certify that this correspondence is being deposited on October 20, 1998, with the United States Postal Service as Express Mail in an envelope addressed to:

ASSISTANT COMMISSIONER FOR PATENTS,
BOX PATENT APPLICATION,
WASHINGTON, DC 20231

and bearing Label Number EL210104252US.


Anna Maria Keel

PATENT

Docket No. L0012/7001
Bedrosian-4

Inventors: Paul Stephan Bedrosian

OPTICAL SYNCHRONIZATION SYSTEM

OPTICAL SYNCHRONIZATION SYSTEM

FIELD OF THE INVENTION

5 The invention relates to synchronization systems and, more particularly, to synchronization systems for the telephone office environment.

BACKGROUND OF THE INVENTION

10 Synchronization systems are widely employed within telephone offices, for example, to distribute synchronization signals to various digital circuit elements that employ the synchronization signals in the timing, transmission, reception, and routing of signals. A typical office, such as a telephone central office, includes a central synchronization generator, such as a building integrated timing supply (BITS) clock, which generates and distributes the synchronization, or clock, signals throughout the office to individual network elements within the office. Conventional clock distribution systems often employ DS1 or composite clock timing signals which operate, respectively, at 1.544 Mb/s and 8/64 kb/s.

15 In small offices, this mode of timing distribution is both economical and adequate. In larger offices, offices that employ in the tens of network elements or more, the management and routing of the timing cables can prove to be challenging.

20 That is, in a conventional centralized distribution system such as this, individual twenty-two gauge twisted wire pair shielded cables carry the desired clock signals between each network element and the BITS clock. Each of these cables is typically limited in length to six hundred and fifty five feet. Such length restrictions may severely limit the size of office that may be served by such a conventional synchronization system, with larger
25 offices requiring the addition of another BITS clock. The additional BITS clock must also be synchronized with the first BITS clock in order to avoid timing loops within the office. Not only is there a significant capital expense associated with the addition of a BITS clock, the increased maintenance costs can also be significant. Additionally, noise and crosstalk electromagnetically induced on the cables can seriously degrade the performance of such
30 a system and the number of taps, or ports for connection with network elements, is limited by the number of ports available at the centralized clock source. Furthermore, since

US 2015/0100000 A1
15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500 505 510 515 520 525 530 535 540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625 630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715 720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805 810 815 820 825 830 835 840 845 850 855 860 865 870 875 880 885 890 895 900 905 910 915 920 925 930 935 940 945 950 955 960 965 970 975 980 985 990 995 1000

cabling in such facilities is often routed through cabling “troughs”, the addition of an network element means more cable must be routed through the troughs. Not only may the addition of cables to these troughs exceed the physical capacity of the troughs, maintenance of cables within the troughs could be severely compromised by the forcing too many cables into a trough. That is, since all the clock distribution cabling is routed to a centralized location, the physical bulk of the cabling may prevent the addition of more cabling and may hinder attempts to maintain the existing cabling.

A synchronization system that is relatively impervious to electromagnetic interference, that is readily capable of distributing clock signals substantially farther than six hundred and fifty five feet, and that provides for modular growth to accompany the expansion of an associated office system is therefore highly desirable.

SUMMARY

A synchronization system in accordance with the principles of the present invention includes a central synchronizing management unit, or clock generator, at least one synchronization distribution unit, and at least one network element. Each synchronization distribution unit receives synchronization and management information from the central synchronization management unit. This information may be transmitted directly between the central synchronization management unit and a synchronization distribution unit, or it may be transmitted between synchronization distribution units through a daisy-chained arrangement with other synchronization distribution units.

In an illustrative embodiment, the synchronization system distributes timing signals throughout a telecommunications office such as a central office, over optical communications links. The central synchronizing management unit provides synchronization monitoring capability and synchronization measurement capability allowing a central synchronizing management unit to query network elements for timing metrics, information regarding phase noise, and the network element’s status regarding holdover events, for example

The series-connected arrangement employs both active and passive optical paths. The active path provides clock signal regeneration and performance monitoring functions, while the passive path is more reliable, that is, the passive path is not susceptible to power failures or other failures that may affect the active path, for example. In an illustrative embodiment, the active and passive paths of a daisy-chained group of synchronization distribution units are cross-coupled. That is, the passive optical output of one synchronization distribution unit is connected to the active optical input of a downstream synchronization distribution unit and the active optical output of the synchronization distribution unit is connected to the passive optical input of the downstream synchronization distribution unit. This cross-coupling permits the system to use a passive link to "loop-around" a failed active link, thereby ensuring the survivability of a portion of the active link while avoiding the cost and decreased reliability of fully redundant active optical links. Additionally, since a synchronization distribution unit would receive synchronization signals from two different upstream synchronization distribution units, the passive link being supplied by the active elements within the immediately preceding synchronization distribution unit and the active link being supplied by the active elements from the preceding synchronization distribution unit preceding that one.

A synchronization system in accordance with the principles of the present invention distributes synchronization signals from a central synchronizing management unit through one or more synchronization distribution units to network elements (network elements) within an office that require external synchronization. In an illustrative embodiment synchronization and management signals are carried over optical links between a central synchronizing management unit and each synchronization distribution unit, and between each synchronization distribution unit and each network element. The distributed architecture of the present invention, an architecture that distributes synchronization and management signals to synchronization distribution units which, in turn distribute signals to network elements, reduces the number of links required for the distribution of these signals. That is, each synchronization distribution unit acts as a concentrator, preferably communicating with a plurality of network elements and thereby limiting the number of direct links to a central synchronization management unit. As a result, the number of

cables routed through a given cable trough for communication with a central synchronization management may be considerably less than the number that would be required to directly connect each network element with the central synchronization management unit. In an illustrative embodiment, each synchronization distribution unit is located in relatively close proximity to a plurality of network elements, thus reducing the total length of cable required to serve a given office. Additionally, synchronization and management information is carried over optical links which further reduce the volume occupied by synchronization signaling. The optical links may be implemented as relatively inexpensive multi-mode plastic fibers that, nevertheless, provide substantial immunity to electromagnetic interference and support a relatively large number of network element connections, or "taps". Synchronization distribution units may be connected serially to support an even greater number of network elements.

In an illustrative embodiment, the synchronization distribution units are physically located in close proximity to the network elements they serve. For example, in a multi-floor office a separate synchronization distribution unit may be located on each of the floors to provide synchronization to all the network elements on a given floor. Additionally, the management and synchronization information exchanged between the central synchronization unit and a synchronization distribution unit is carried over a bidirectional optical link. With this arrangement, a synchronization distribution unit in the serial connection of synchronization distribution units may fail without adversely affecting the operation of downstream synchronization units. The central synchronizing management unit may query any synchronization distribution unit within the system to obtain performance statistics. Additionally, the central synchronization management unit may detect faults within the system by setting performance monitoring thresholds and interrogating a synchronization distribution unit to determine whether a performance monitoring threshold has been exceeded.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and further features, aspects, and advantages of the invention will be apparent to those skilled in the art from the following detailed description, taken together with the accompanying drawings in which:

Figure 1 is a conceptual block diagram of a synchronization distribution system in accordance with the principles of the invention;

Figure 2 is a block diagram of a synchronization distribution system in accordance with the principles of the present invention;

Figure 3 is a conceptual block diagram of a central synchronizing management unit in accordance with the principles of the present invention; and

Figure 4 is a more detailed block diagram of a synchronization distribution system in accordance with the principles of the present invention.

DETAILED DESCRIPTION

A synchronization system in accordance with the principles of the present invention distributes synchronization signals from a central synchronizing management unit through one or more synchronization distribution units to network elements within an office that require external synchronization. In an illustrative embodiment synchronization and management signals are carried over optical links between a central synchronizing management unit and each synchronization distribution unit, and between each synchronization distribution unit and each network element. The distributed architecture of the present invention, an architecture that distributes synchronization and management signals to synchronization distribution units which, in turn, distribute signals to network elements, reduces the number of links required for the distribution of these signals. That is, each synchronization distribution unit acts as a concentrator, preferably communicating with a plurality of network elements and thereby limiting the number of direct links to a central synchronization management unit. As a result, the number of cables routed through a given cable trough for communication with a central synchronization

management may be considerably less than the number that would be required to directly connect each network element with the central synchronization management unit. In an illustrative embodiment, each synchronization distribution unit is located in relatively close proximity to a plurality of network elements, thus reducing the total length of cable required to serve a given office. Additionally, synchronization and management information is carried over optical links which further reduce the volume occupied by synchronization signaling. The optical links may be implemented as relatively inexpensive multi-mode plastic fibers that, nevertheless, provide substantial immunity to electromagnetic interference and support a relatively large number of network element connections. Synchronization distribution units may be connected in series to support an even greater number of network elements, hundreds, for example.

A synchronization system in accordance with the principles of the present invention is illustrated in the conceptual block diagram of Figure 1 which includes a central synchronization management unit 100 a first synchronization distribution unit 102 and network elements 104 and 106. The system also includes a second synchronization distribution unit 108, and network elements 110, 112, and 114. The central synchronization management unit 100 is respectively connected via optical data links 116 and 118 to synchronization distribution unit 102 and synchronization distribution unit 108. network elements 104 and 106 are respectively connected to synchronization distribution unit 102 through optical links 120 and 122. Similarly, network elements 110, 112, and 114 are respectively connected to synchronization distribution unit 108 through optical links 124, 126, and 128. Each of the optical links may be implemented using relatively low-cost multi-mode 870 nanometer optical fiber, for example. Such fiber provides immunity to electromagnetic interference, higher bandwidth, greater distance, and lower attenuation 22 gauge shielded twisted pair cabling. In the illustrative embodiment, the central synchronizing management unit incorporates a high quality clock, such as a Cesium clock. The central synchronizing management unit provides timing information, in the form of a clock signal, that may take the form of a DS-1, composite clock or sine wave signal, for example. Additionally, the central synchronizing management unit 100 provides signal status information to the synchronization distribution units 102 and 108. The signal status

information may take the form of signals which indicate the validity and/or origin of the synchronization reference, or clock signal, being transmitted to the synchronization distribution units. Status information will be discussed in greater detail in the discussion related to Figure 2. Clock sources and related status information are discussed, for example, in "Generic Requirements for Timing Signal Generators", Bellcore GR-378-CORE, and in "Clocks for the Synchronized Network: Common Generic Criteria", Bellcore GR-1244-CORE, which are hereby incorporated by reference.

Although a synchronization distribution system in accordance with the principles of the present invention may be employed as an intra-office synchronization system within a wide variety of telecommunication offices, the system is particularly well-suited for application in synchronized telecommunications systems such as SONET systems or synchronous digital hierarchy (SDH) systems. SONET systems are known and discussed, for example in United States Patent 5,682,257 issued to Uchida, which is hereby incorporated by reference in its entirety.

Network elements such as network element 104, 106, 110, etc, may be a digital multiplexor, a digital switch, or a router, for example. Each synchronization distribution unit includes a receiver module that incorporates both active and passive receiver elements, the combination of which permits a daisy-chained interconnection of synchronization distribution units. The daisy-chained interconnection of synchronization distribution units, in turn, provides for the synchronization of hundreds of network elements from a single central synchronizing management unit output. The central synchronizing management unit performs the recovery and processing of the input signal sources, Stratum II holdover protection during dual-input failures, the processing of performance monitor information, and output timing signals with performance monitor information.

Turning now to the conceptual level block diagram of Figure 2, a synchronization distribution system 201 in accordance with the principles of the present invention is shown in greater detail. A central synchronizing management unit 200 is connected to receive synchronization, or clock, signals from a plurality of clock sources, such as a global positioning system (GPS) receiver 202 and a craft interface terminal (CIT) 204. The GPS receiver is connected to receive its clock signal from an antenna 206. The central

5 synchronizing management unit 200 selects one of the clock sources 202 or 204 as a primary source and the other as a secondary source. Should the primary source fail, the central synchronizing management unit switches to the secondary source to provide clock signals to the remainder of the system 201. In this illustrative embodiment, the central synchronizing management unit 200 may be connected through a redundant bidirectional optical link 208 to a synchronization distribution unit 210. The central synchronizing management unit 200 provides the synchronization distribution unit 210 with synchronization and management information through the link 208. The synchronization distribution unit 210 passes the synchronization information to a plurality of network elements 212, . . . 214, through respective optical links 216, . . . 218. A separate link 220 between one or more network elements and an associated synchronization distribution unit 210 permits a synchronization distribution unit to monitor the performance of each synchronization distribution unit by querying the network element regarding holdover state, fault history, reference switching, for example. The queries may be carried along the optical communication link 216 and reply may be returned along the optical link 220. Queries along the link 216 may be incorporated with clock signals by bridging the clock signal, for example.

20 Another synchronization distribution unit 222 is connected to the central synchronizing management unit 200 via a redundant bidirectional optical link 224. The synchronization distribution unit 222 is connected in series to synchronization distribution units 225 and 226 through redundant, cross-coupled, optical links 228 and 230 which will be described in greater detail in the discussion related to Figure 4. Briefly, though, the cross-coupling of the optical links 228 and 230 refers to the fact that each of the synchronization distribution units includes an active and a passive optical link and that the active link of one synchronization distribution unit is routed to the passive link of a downstream synchronization distribution unit and the passive link of an synchronization distribution unit is connected to the active link of a downstream synchronization distribution unit. Each of the synchronization distribution units 222, 225, and 226 respectively supplies synchronization and management signaling to network elements 232 through 234, 236 through 238, and 240 through 242.

In general, the central synchronizing management unit 200 provides interfaces for highly stable low error rate clock input signals such as GPS, Stratum I clocks, or other such inputs and provides, for example, Stratum II level output clock signals. The central synchronizing management unit 200 is illustrated in greater detail in the block diagram of Figure 3. The central synchronizing management unit 200 includes a clock recovery circuit that illustratively receives clock input signals from highly accurate, and stable clock sources, such as the GPS clock source 202 or CIT clock source 204 of Figure 2. The clock recovery circuit 300 includes primary and secondary input recovery circuits 302 and 304, respectively. In this illustrative embodiment, the clock recovery circuit 302 may be a clock recovery circuit such as may be used in conjunction with a cesium or other highly stable clock source. The clock recovery circuit operates to recover the desired clock signal from the input GPS, CIT, or other signal. That is, the clock recovery circuit 302 performs various known functions, such as demodulation, stripping status and control messages, etc. from the input signals to produce the desired clock reference signal. The clock recovery circuitry also operates to reduce jitter and wander and to maintain the recovered clock signal within the particular frequency and phase error bounds, such as Stratum II error bounds in this illustrative embodiment.

A clock processor 306 receives the recovered clock signals, a primary and a secondary recovered clock signal in this illustrative embodiment, from the clock recovery circuit 300. The clock processor normally selects the primary recovered clock signal to further process and pass along as the synchronization system's clock signal. However, should the clock processor 306 detect a failure, such as a loss of signal, in the primary clock signal, the clock processor 306 switches to the signal from the secondary input recovery circuit 304. The clock processor 306 multiplies the recovered clock signal to a highly stable fixed frequency above 10 MHz before passing it along to an optical input/output processor 308 along electrical signal path 309.

In addition to receiving the recovered clock signal from the clock processor 306, the optical input/output processor exchanges information with a performance monitor system 310 through a bidirectional electrical path 312. Performance monitoring information from the central synchronizing management unit provides downstream synchronized equipment,

such as network elements 212 through 214 or network elements 232 through 242 of Figure 2, with information regarding the integrity of the timing signal received by the central synchronizing management unit 200 from sources such as the GPS source 202 or CIT source 204. This information may take the form of a signature appended to the clock output signal from the central synchronizing management unit, for example. Such performance monitoring information may be used by downstream equipment to prepare for a possible clock failure before the clock failure creates errors, for example.

The performance monitoring signature could incorporate the bit error rate (BER), frequency stability (e.g., Stratum II or III), holdover status, and free-run status of the central synchronizing management unit and could be serially coded with the output clock signal produced by the central synchronizing management unit and supplied to an optical interface system 314. The data rate of the signature could be relatively low, e.g., 100 bits per second. Because of the signature signal's relatively low data rate, such a signal could be readily accommodated by the synchronization system without interference to the clock signal.

The performance monitor 310 may be implemented as either an integral part of the central synchronizing management unit 200 or it could be implemented as an external component. As an external component, the performance monitor could communicate with the optical Input/Output processor 308 and an alarm and Input/Output processing module 316 through a standard interface, such as an RS232 interface. Information from the performance monitor 310 could be employed by the alarm and Input/Output processing module 316 to control such central synchronizing management unit functions as internal reference switching, e.g., between the primary and secondary input recovery modules, remote alarm reporting, and holdover or free-run modes of operation.

In operation, the central synchronizing management unit 200 recovers clock signals from external sources, such as a GPS receiver 202, CIT 204 or other Stratum I traceable clock source. The recovered clock signal is retimed, that is, regenerated with a PLL circuit, for example, to reduce jitter and phase error, with a Stratum 2 or better clock by the clock processor 306. After recovering and retiming the clock signal, the clock signals are converted to optical form by an optical Input/Output processor 308. The optical

Input/Output processor 308 provides the optical clock signal to an optical interface signal which distributes the optical clock signal to one or more synchronization distribution units, such as synchronization distribution units 210, 222, 225, and 226 of Figure 2. The central synchronizing management unit provides a CIT management interface for management and control of the central synchronizing management unit and synchronization distribution units through the alarm and I/O processing module 316. This management and control interface is extended through the optical interface system 314 to every synchronization distribution unit connected to the central synchronizing management unit 200. The alarm and Input/Output processing module 316 also issues local and remote synchronization system alarms to the CIT management interface, indicating, for example the failure of an active optical link within an associated synchronization distribution unit. The central synchronizing management unit may employ conventional LED laser optics and multi-mode optical fiber to distribute clock signals over thousands of feet within a telecommunications office environment.

The central synchronizing management unit provides duplicate active optical outputs to each of its associated synchronization distribution units through its optical interface system 314. In an illustrative embodiment duplicated optical signals may be provided by separate optical components within the central synchronizing management unit, thereby effecting another layer of hardware redundancy.

Additionally, in an illustrative embodiment, the central synchronizing management unit employs wavelength division multiplexing to support an in-band full duplex management channel at each optical distribution port of the optical interface system 314. The central synchronizing management unit is the central operations site for all management functions related to the synchronization domain, such as operations administration monitoring and provisioning (OAM&P) functions. The central synchronizing management unit may query each synchronization distribution unit to obtain various performance statistics. Additionally, the central synchronizing management unit may set performance monitoring thresholds at each of the central synchronizing management unit's associated synchronization distribution units.

The optical interface system 314 may comprise optical output drivers physically located on separate printed circuit cards, with each driver card including several, e.g., ten, parallel outputs. In this embodiment, two separate driver cards are used to service a single output tap. In this way, with their outputs "ORed", a driver card may be removed for maintenance without affecting service. By using a series of passive/active repeater modules, each output may service multiple equipment taps (perhaps as many as ten). If each output driver card is able to provide 100 timing taps, a shelf complement of no more than ten such drivers would be sufficient for most office applications.

The conceptual block diagram of Figure 4 illustrates a synchronization distribution unit 400 such as the synchronization distribution unit 102 of Figure 1 in greater detail. The synchronization distribution unit 400 translates optical clock signals into electronic clock signals such as DS1 E1, composite clock, or analog timing signals, then distributes the electronic clock signals to associated network elements. Additionally, the synchronization distribution unit 400 provides includes both active and passive optical ports for connection to other synchronization distribution units. In the conceptual block diagram of Figure 4, the synchronization distribution unit 400 includes a passive optical link that comprises an optical beam splitter 402, a primary optical path 404, and a secondary optical path 406. Each optical path provides a bidirectional communications link and, as noted above, upstream and downstream signals may be transmitted simultaneously using wavelength division multiplexing. That is, signals may be sent along the paths 404 and 406 in an upstream direction using an optical signal of one wavelength and in a downstream direction using an optical signal having a different wavelength. The primary path 404 and secondary path 406 may be generated in parallel by a centralized synchronization management system such as central synchronization management unit 200 of Figure 2 from a selected one of its primary or secondary inputs such as GPS receiver 202 or CIT source 204.

Each synchronization distribution unit 400 also includes an active optical link, including an optical selector, amplifier and timing recovery circuit 408 and primary and secondary optical paths 410 and 412, respectively. The circuit 408 receives primary and secondary timing signals from the optical beam splitter 402 along primary and secondary optical paths 414 and 416. The passive link comprising the optical beam splitter 402 may be connected

to receive its primary and secondary optical clock signals from an upstream active link and to send its output to a downstream active link. Similarly, the active optical link, comprising the circuit 408, may be connected to receive its primary and secondary optical clock signals from an upstream passive link and to send its output to a downstream passive link.

5 In this way, should the active link fail, due to a failure of power supplied to the circuit 408, for example, a downstream active link will still receive and operate on both primary and secondary clock signals.

In operation primary and secondary timing signals are received along the primary and secondary optical paths 404 and 406 which, together with the optical beam splitter 402, form the passive optical link. Both signals are split and a portion of the signals proceed along the paths 404 and 406 while another portion is routed along paths 414 and 416 to the circuit 408. The circuit 408 selects among the four input optical signals, i.e., the primary and secondary signals from paths 404 and 406 and the primary and secondary signals from paths 410 and 412, to pass along to a timing processor and synchronizer 418.

The timing processor and synchronizer 418 operates to retime the signals, and passes the retimed signals to electronic output drivers 420 which convert the optical signals to electronic signals for distribution to network elements served by the synchronization distribution unit 400. An electronic timing interface circuit 422 receives information in the form of performance monitoring signals, for example, from the network elements served by the synchronization distribution unit 400. This information is passed to a performance monitoring circuit 424 which processes the signals and passes the performance monitoring information along to an alarm and optical selector circuit 426. The alarm and optical selector circuit 426 processes this information and passes it along to the circuit 408 which, based in part on this information, determines which of the clock signals, primary or secondary, is to be used as a clock source for the attached network elements.

The number of electronic output ports 428 can range from 10s to 100s of ports, depending on the application. The electronic timing signals from these ports may be DS1, E1, composite clock, or analog timing signals. Each synchronization distribution unit 400 may have selectable options to generate any of these commonly used signals. In addition to these timing output signals, each synchronization distribution unit 400 may have the

ability to monitor parameters such as maximum time interval error (MTIE) and time deviation (TDEV) through the interface 422. In this manner the performance of each of the attached network elements may be monitored and performance information passed along to the central synchronizing management unit serving the synchronization distribution unit 400.

The synchronization distribution units may be implemented as small, inexpensive optical receiver/regenerators located at the equipment to be timed and may be operated from redundant 48 volt office batteries. Physically small synchronization distribution units could be located within the say bay or even the same electrical backplane as the network element or network elements that receives the clock signal. Such an arrangement would further reduce the susceptibility of the synchronization system to electromagnetically induced noise.

In the illustrative embodiment, the alarm and optical system processor 426 decodes status information from the performance monitor 424. The synchronization distribution unit 400 may employ that information to, for example, cut off the output signal at the port 428.

The synchronization distribution unit 400 may also send the status information to the attached network element, so that synchronization alarms may be issued by the network element. A passive loop around optical path, which preserves the passive optical path, may be included at the point where an synchronization distribution unit is incorporated into a system in order to permit the outswapping of network elements for maintenance or repair.

The foregoing description of specific embodiments of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed, and many modifications and variations are possible in light of the above teachings. The embodiments were chosen and described to best explain the principles of the invention and its practical application, and to thereby enable others skilled in the art to best utilize the invention. It is intended that the scope of the invention be limited only by the claims appended hereto.

What is claimed is:

CLAIMS

- 1 1. Apparatus for providing synchronization signals to a telecommunications network
2 comprising:
3 a central synchronization management unit for distributing synchronization signals, and
4 a synchronization distribution unit connected to receive synchronization signals from
5 the central synchronization management unit and to distribute the signals to at least
6 one network element.
- 1 2. The apparatus of claim 1 wherein the synchronization signals are optical signals.
- 1 3. The apparatus of claim 2 wherein the central synchronization management unit
2 comprises:
3 an input port for receiving a clock signal, and
4 an optical processor for producing optical clock signals.
- 1 4. The apparatus of claim 3 wherein the central synchronization management unit further
2 comprises:
3 a processor for retiming clock signals received at said input port.
- 1 5. The apparatus of claim 4 wherein the input port is equipped to receive clock signals
2 from a plurality of clock sources.
- 1 6. The apparatus of claim 5 wherein the central synchronization management unit selects
2 one of a plurality of input clock signals as a primary clock output signal.
- 1 7. The apparatus of claim 6 wherein the central synchronization management unit
2 produces a plurality of optical clock output signals.

1 8. The apparatus of claim 2 wherein the synchronization distribution unit comprises:
2 a passive optical input port configured to receive an optical clock signal and to split the
3 optical clock signal into two signals, routing one of the split signals to an optical output.

1 9. The apparatus of claim 8 wherein the synchronization distribution unit further
2 comprises:
3 an active optical input port configured to receive an optical clock signal; and
4 a clock recovery system configured to perform clock recovery on an optical clock signal
5 received at either the active or passive optical input port.

1 10. The apparatus of claim 9 wherein the clock recovery system is configured to receive
2 optical clock signals from said active optical input port and from said passive optical
3 input port and to perform clock recovery on an optical clock input from a selected
4 one of the active and passive optical input ports.

1 11. The apparatus of claim 10 wherein the synchronization distribution unit further
2 comprises an alarm and optical system processor for determining which one of signals
3 received from the active and passive optical input ports to perform clock recovery on.

1 12. The apparatus of claim 11 wherein the synchronization distribution unit further
2 comprises electronic output drivers for converting an optical signal upon which clock
3 recovery has been performed into an electronic clock output signal for provision to a
4 telecommunications network element.

1 13. The apparatus of claim 10 wherein the synchronization distribution unit includes
2 passive and active optical output ports, the active output port being configured to
3 receive the optical clock signal upon which clock recovery has been performed, the
4 passive optical output port being configured to receive the optical clock signal split
5 at the passive optical input port and routed to an optical output

1 14. The apparatus of claim 10 further comprising a second synchronization distribution
2 unit connected in series with the synchronization distribution unit connected to
3 receive synchronization signals from the central synchronization management unit,
4 the second synchronization distribution unit configured to receive synchronization
5 signals from the synchronization distribution unit connected to receive
6 synchronization signals from the central synchronization management unit.

1 15 The apparatus of claim 14 wherein synchronization distribution units connected in
2 series are cross-coupled, such that the active output of an upstream synchronization
3 distribution unit is coupled to the passive input port of the next downstream
4 synchronization distribution unit in the series and the passive output of the upstream
5 synchronization distribution unit is coupled to the active input port of the next
6 downstream synchronization distribution unit in the series.

1 16 A method of distributing synchronization signals in a telecommunications office
2 comprising the steps of:
3 (a) recovering a clock signal at a central synchronization management unit, and
4 (b) retiming the clock signal from the central synchronization management unit and
5 distributing it over an optical link to a synchronization distribution unit, and
6 (b) transmitting the clock signal from the synchronization distribution unit to a
7 telecommunications network element.

1 17. The method of claim 16 wherein a plurality of clock signals are received at a central
2 synchronization management unit in step (a) and one of them is selected by the
3 central synchronization management unit for supply to the synchronization
4 distribution unit.

1 18 The method of claim 17 wherein the central synchronization management unit
2 produces two clock output signals from the selected one of the plurality of clock
3 signals received by the central synchronization management unit in step (a), and
4 transmits one of the clock output signals over an optical link to an active input port
5 of the synchronization distribution unit and transmits the other of the clock output
6 signals over an optical link to a passive input port of the synchronization distribution
7 unit.

1 19. The method of claim 18 further comprising the step of selecting by an
2 synchronization distribution unit of one of the passive and active optical input clock
3 signals to transmit to a network element.

2 20. The method of claim 19 wherein the selected clock signal is converted from an
optical to an electrical signal before transmission to the network element.

2 21. The method of claim 20 wherein a plurality of synchronization distribution units are
connected in series, with the passive output port of an upstream synchronization
distribution unit coupled to the active input port of a downstream synchronization
distribution unit and the active output port of an upstream synchronization
distribution unit coupled to the passive input port of a downstream synchronization
distribution unit, each synchronization distribution unit performing clock recovery on
the synchronization signal received at its active input port.

ABSTRACT OF THE DISCLOSURE

A synchronization system in accordance with the principles of the invention includes a central synchronizing management unit, at least one synchronization distribution unit, and at least one network element. Each synchronization distribution unit receives synchronization and management information from the central synchronization management unit. This information may be transmitted directly from the central synchronization management unit, or it may be transmitted through another synchronization distribution unit in a group of a daisy-chained synchronization distribution units. The daisy-chained arrangement employs both active and passive optical paths. The central synchronizing management unit may query any synchronization distribution unit within the system to obtain performance statistics. Additionally, the central synchronizing management unit may detect faults within the system by setting performance monitoring thresholds and interrogating a synchronization distribution unit to determine whether a threshold has been exceeded. The synchronization distribution units are physically located in close proximity to the network elements they serve. Additionally, the management and synchronization information exchanged between the central synchronization unit and a synchronization distribution unit is carried over a bidirectional optical link.

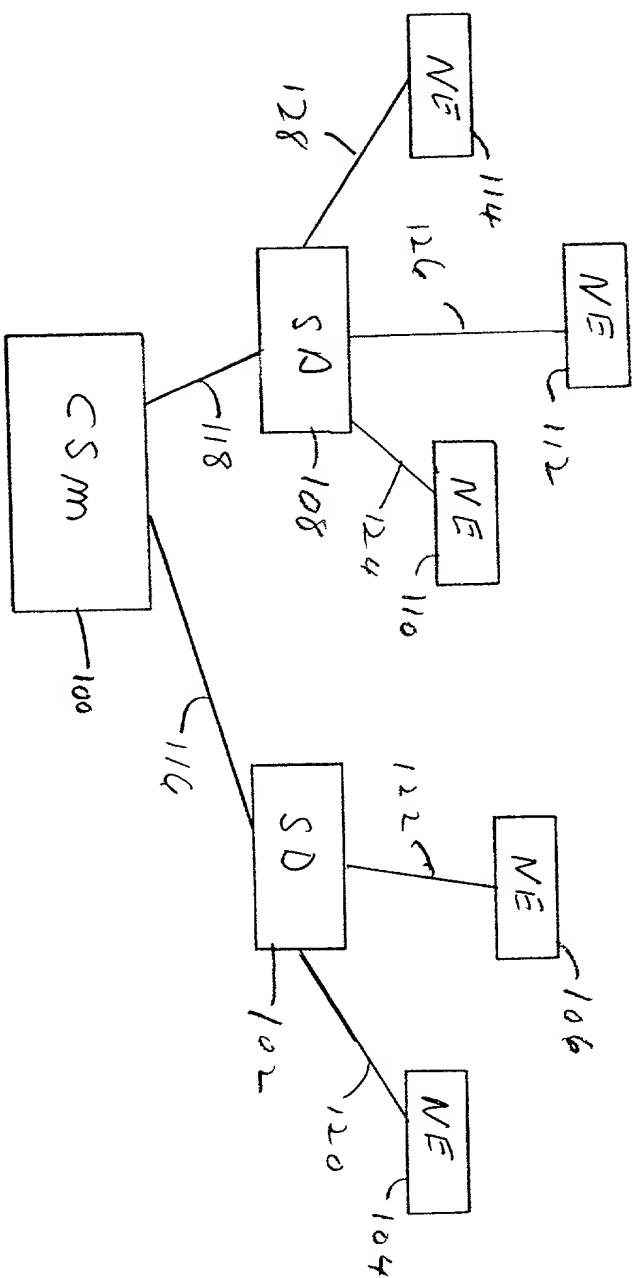


FIGURE 1

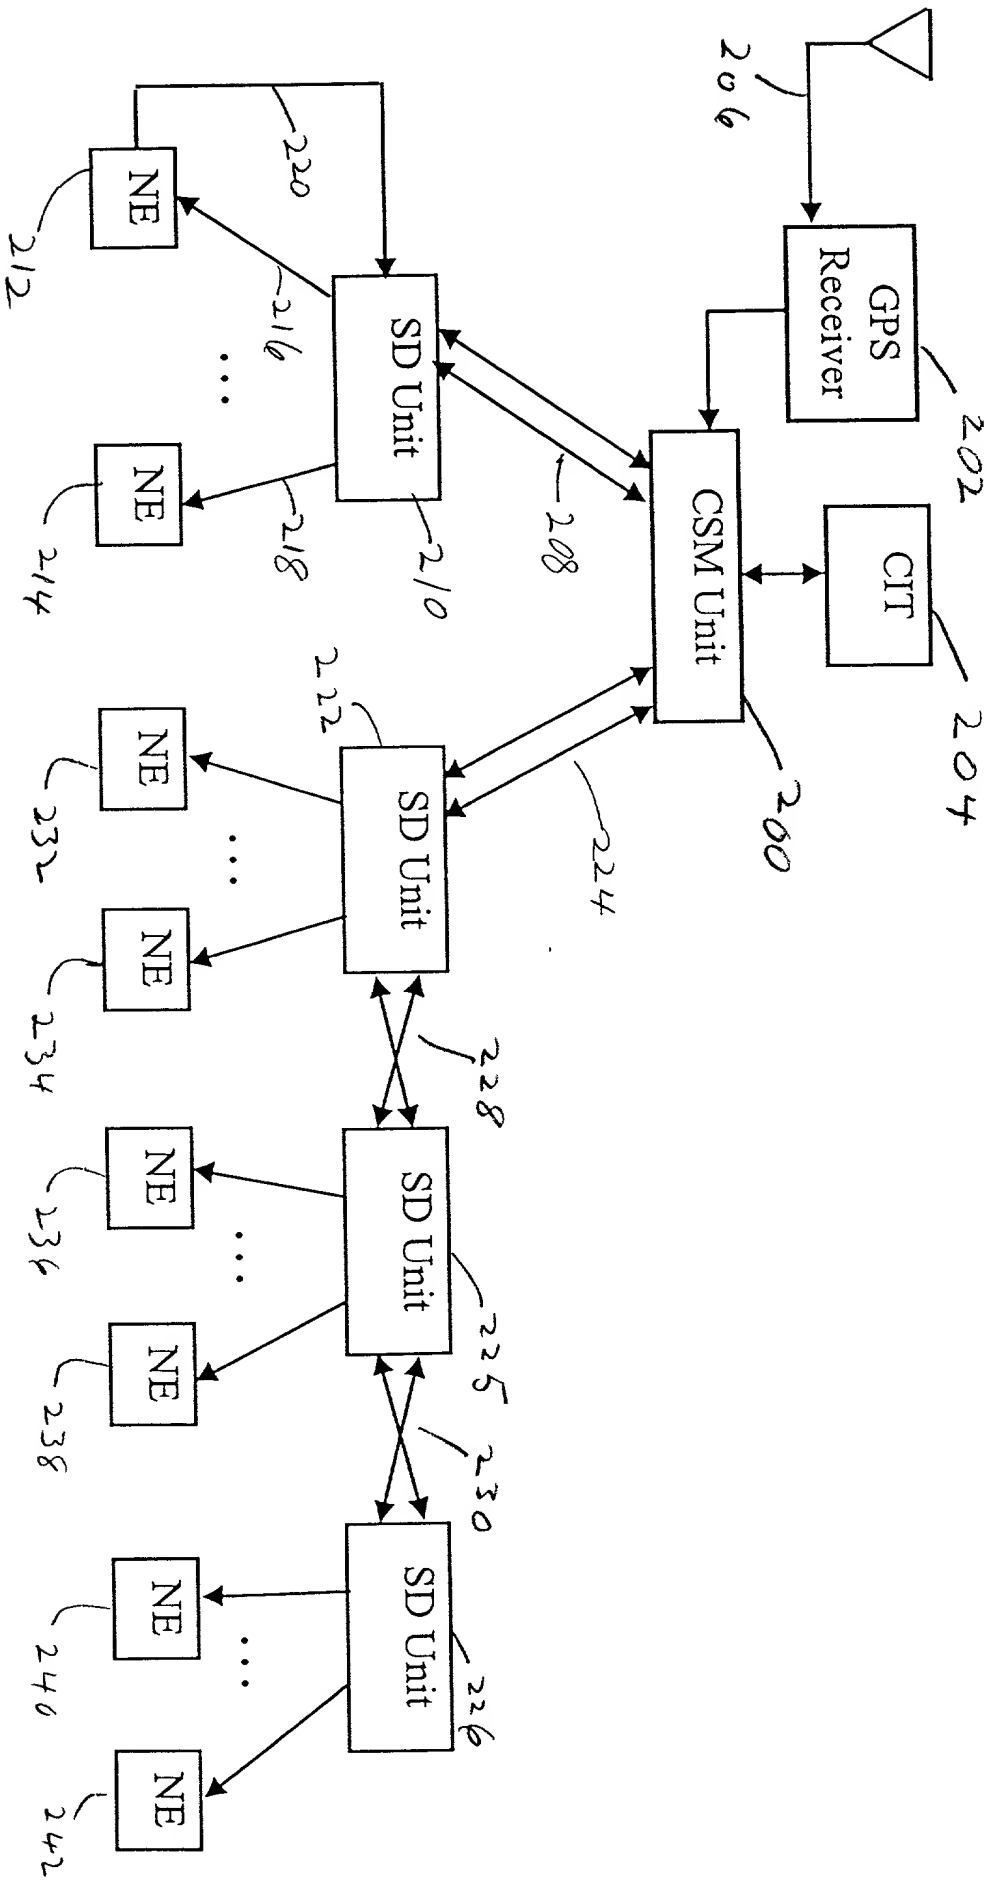


FIGURE 2


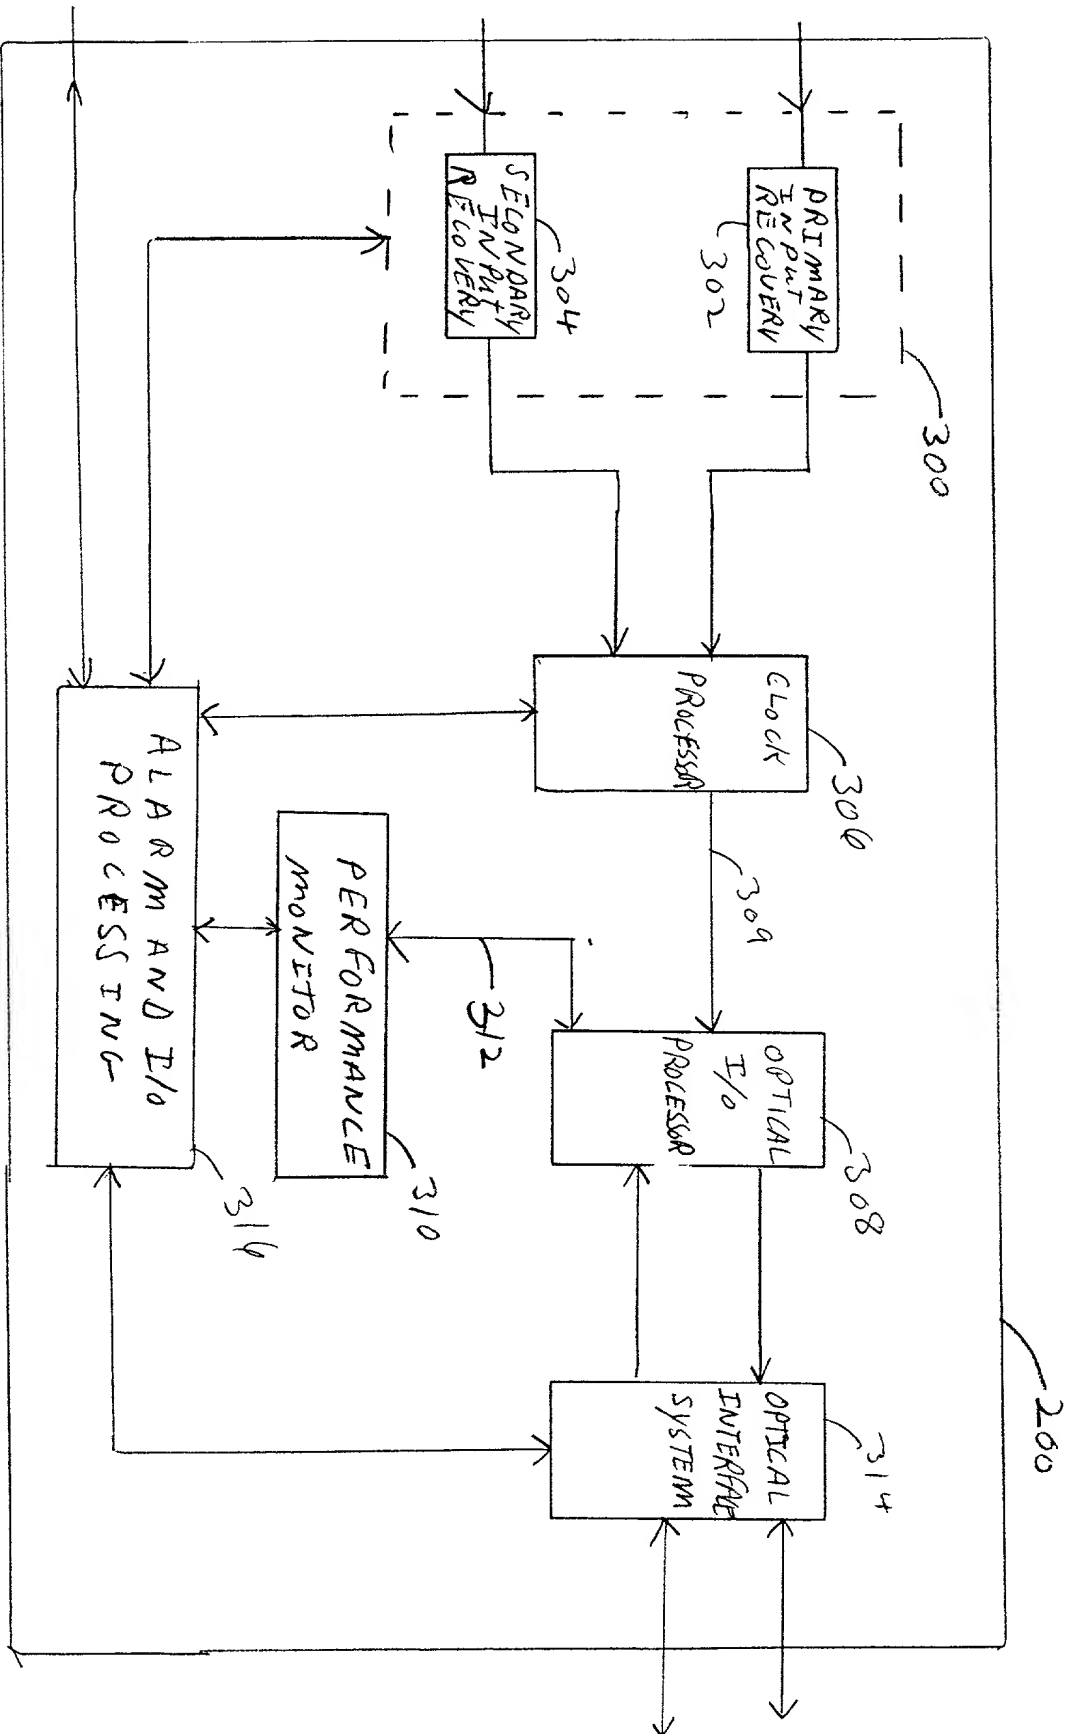


FIGURE 3

09170000 100000

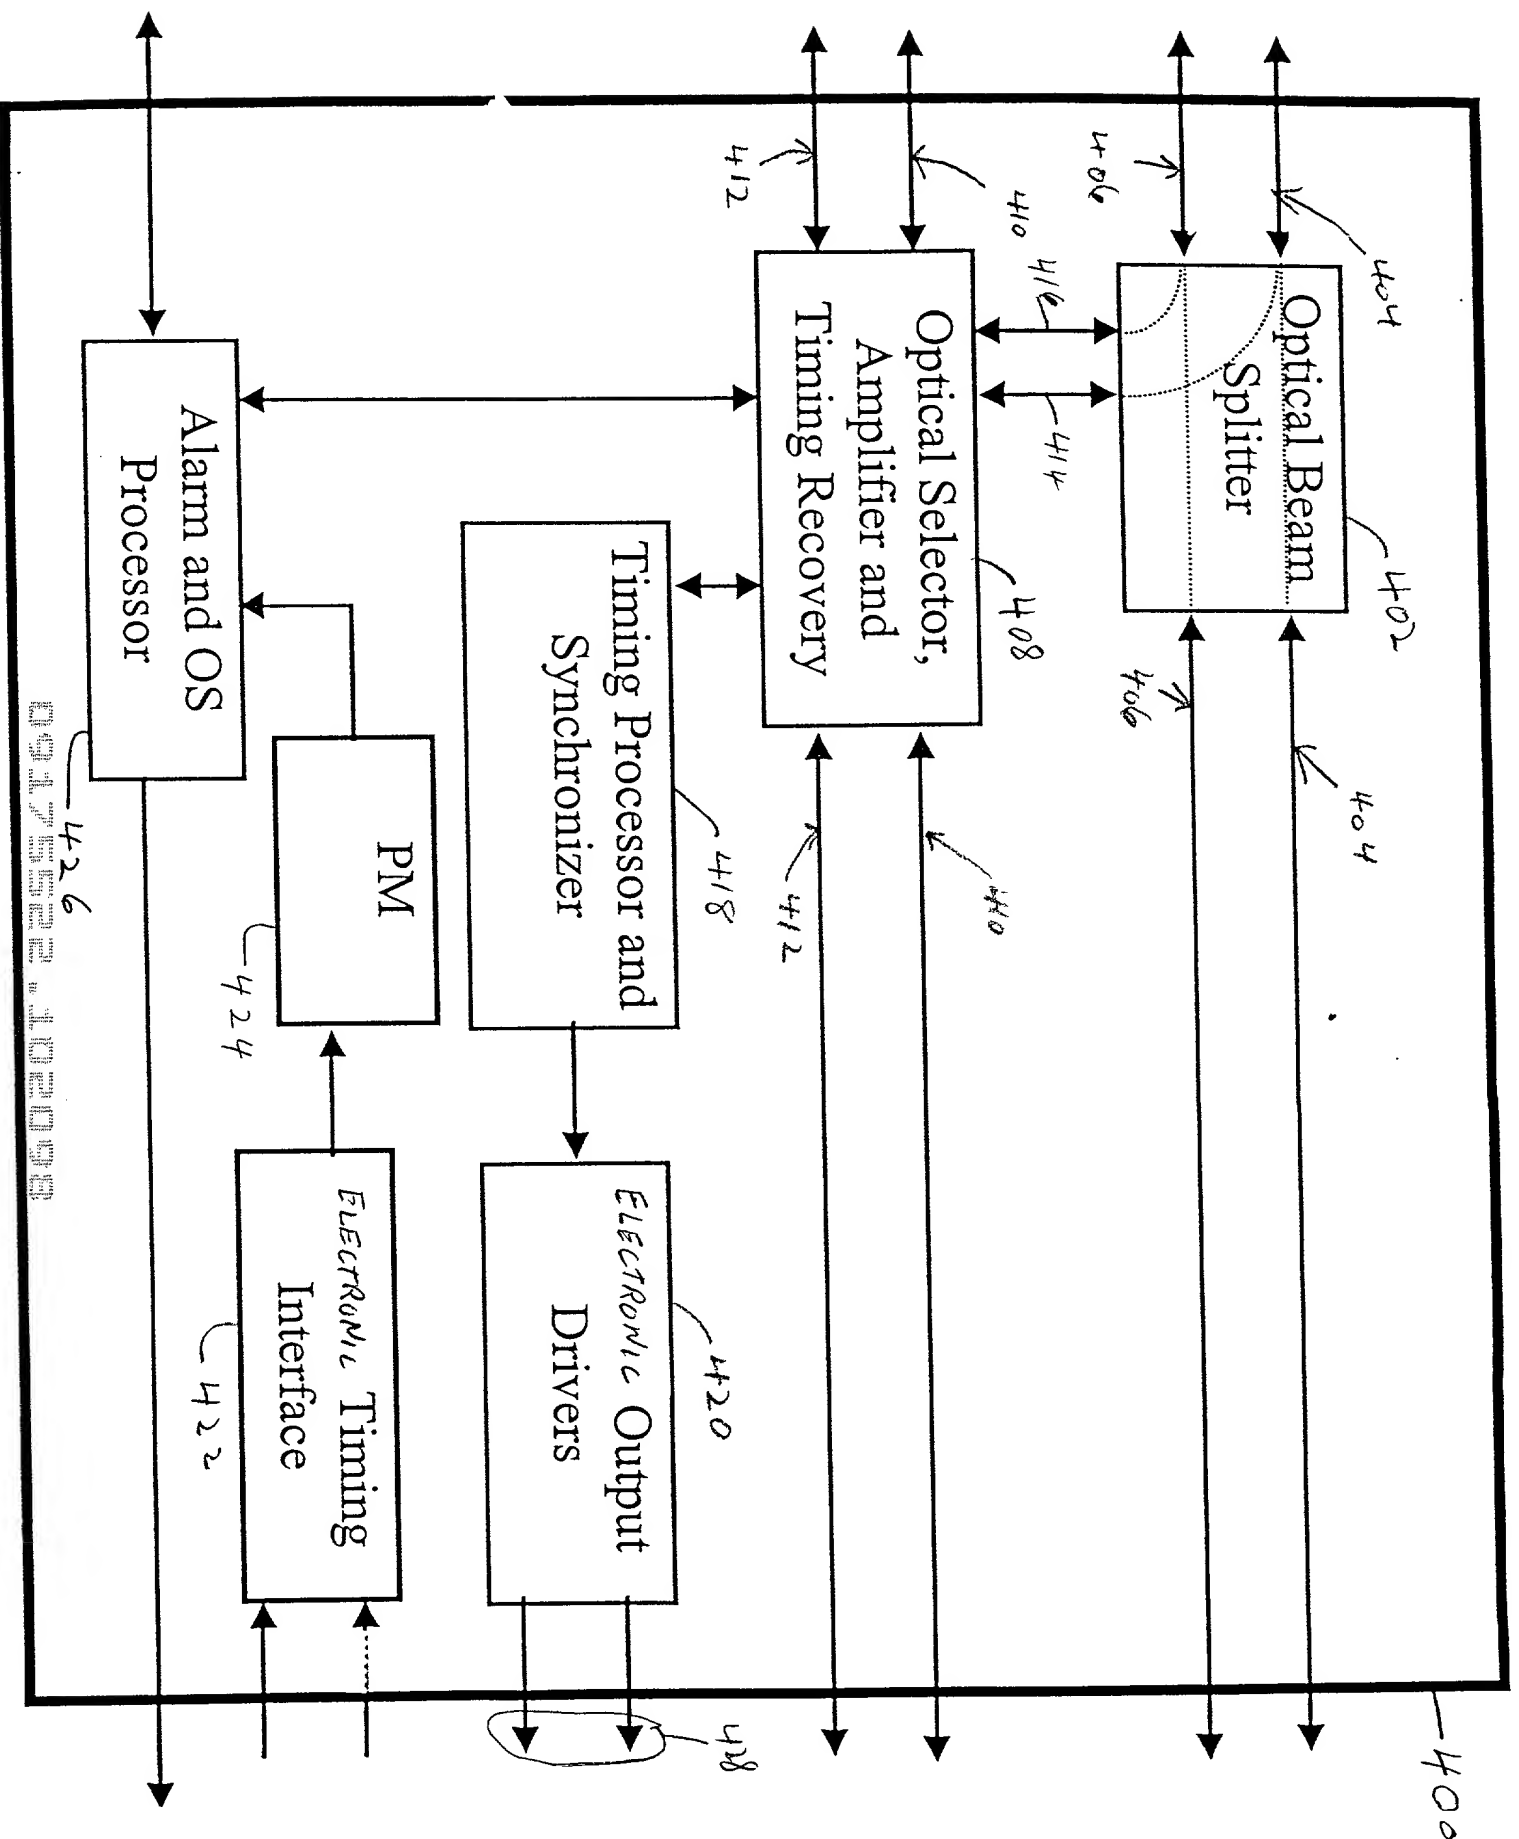

09175622, 102098

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **OPTICAL SYNCHRONIZATION SYSTEM** the specification of which *is attached hereto*.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

091263 102093

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Lester H. Birnbaum	(Reg. No. 25830)
Richard J. Botos	(Reg. No. 32016)
Jeffery J. Brosemer	(Reg. No. 36096)
Kenneth M. Brown	(Reg. No. 37590)
Donald P. Dinella	(Reg. No. 39961)
Guy Eriksen	(Reg. No. P-41736)
Martin I. Finston	(Reg. No. 31613)
James H. Fox	(Reg. No. 29379)
Barry H. Freedman	(Reg. No. 26166)
Julio A. Garceran	(Reg. No. 37138)
Mony R. Ghose	(Reg. No. 38159)
Jimmy Goo	(Reg. No. 36528)
Anthony Grillo	(Reg. No. 36535)
Stephen M. Gurey	(Reg. No. 27336)
John M. Harman	(Reg. No. 38173)
Donald E. Hayes, Jr.	(Reg. No. 33245)
John W. Hayes	(Reg. No. 33900)
Mark A. Kurisko	(Reg. No. 38944)
Irena Lager	(Reg. No. 39260)
Christopher N. Malvone	(Reg. No. 34866)
Scott W. McLellan	(Reg. No. 30776)
Martin G. Meder	(Reg. No. 34674)
Geraldine Monteleone	(Reg. No. 40097)
John C. Moran	(Reg. No. 30782)
Michael A. Morra	(Reg. No. 28975)
Gregory J. Murgia	(Reg. No. 41209)
Claude R. Narcisse	(Reg. No. 38979)
Joseph J. Opalach	(Reg. No. 36229)
Neil R. Ormos	(Reg. No. 35309)
Eugen E. Pacher	(Reg. No. 29964)
Jack R. Penrod	(Reg. No. 31864)
Daniel J. Piotrowski	(Reg. No. P-42079)
Gregory C. Ranieri	(Reg. No. 29695)
Scott J. Rittman	(Reg. No. 39010)
Eugene J. Rosenthal	(Reg. No. 36658)
Bruce S. Schneider	(Reg. No. 27949)
Ronald D. Slusky	(Reg. No. 26585)
David L. Smith	(Reg. No. 30592)
Patricia A. Verlangieri	(Reg. No. P-42201)
John P. Veschi	(Reg. No. 39058)
David Volejnicek	(Reg. No. 29355)
Charles L. Warren	(Reg. No. 27407)
Eli Weiss	(Reg. No. 17765)

RECEIVED

I hereby appoint the attorney(s) on ATTACHMENT A as associate attorney(s) in the aforementioned application, with full power solely to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected with the prosecution of said application. No other powers are granted to such associate attorney(s) and such associate attorney(s) are specifically denied any power of substitution or revocation.

Paul Stephan Bedrosian:

Inventor's
signature Paul Stephan Bedrosian Date 10-16-98

Residence: 7 Enfield Drive, Andover, MA 01810

Citizenship: USA

Post Office Address: 7 Enfield Drive, Andover, MA 01810

State of Massachusetts
County of Essex

Subscribed and sworn/affirmed before me this 16 day of October 1998
by Teresa J. Sielicki

Teresa J. Sielicki
My Commission Expires

TERESA J. SIELICKI
Notary Public
My Commission Expires November 6, 2003

09175533 102098

[illegible]

James W. Wiegand
KUDIRKA & JOBSE, LLP
Two Center Plaza
Boston, MA 02108